


Model 17



一相步進馬達驅動器

五相步進馬達驅動器

DC馬達控制器

AC馬達控制器


振動盤控制器

規格表

馬達編號		步進角 Deg	電壓 V/Phase	電流 A/Phase	握持扭矩 gf-cm	阻抗 Ω/Phase	感抗 mH/Phase	轉子慣量 g-cm ²	重量 g
單軸	雙軸								
MPK243-01A	MPK243-01B	1.8	4.0	0.95	1600	4.2	2.5	35	200
MPK243-02A	MPK243-02B	1.8	9.6	0.4	1600	24	15	35	200
MPK243-03A	MPK243-03B	1.8	12	0.31	1600	38.5	23	35	200
MPK244-01A	MPK244-01B	1.8	4.0	1.2	2600	3.3	3.2	53	250
MPK244-02A	MPK244-02B	1.8	6.0	0.8	2600	7.5	7.0	53	250
MPK244-03A	MPK244-03B	1.8	12	0.4	2600	30	28	53	250
MPK244-04A	MPK244-04B	1.8	24	0.2	2600	120	112	53	250
MPK245-01A	MPK245-01B	1.8	4.0	1.2	3200	3.3	2.8	68	350
MPK245-02A	MPK245-02B	1.8	6.0	0.8	3200	7.5	7.0	68	350
MPK245-03A	MPK245-03B	1.8	12	0.4	3200	30	28	68	350

尺寸圖


Dimension (Unit: mm)

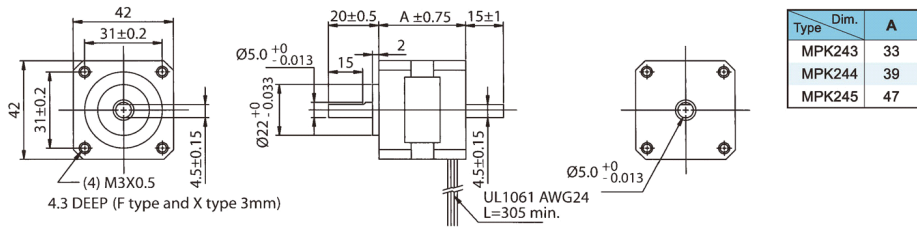

出線線色、接線、驅動方式

六線式馬達

Wiring Diagram

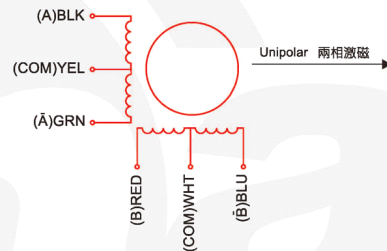

STEP	黑 Black A	紅 Red B	綠 Green A	藍 Blue B	COM	CCW ↑ ↓ CW
1	NO	NO			+DCV	↑ ↓
2		NO	NO			
3			NO	NO		
4	NO			NO		