


MPK系列二相步進馬達為HANMARK品牌標準產品，搭配HANMARK步進驅動器更能展現良好之性能。

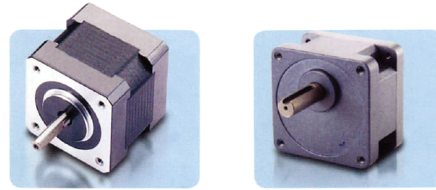

17 MPK系列二相步進馬達規格

馬達編號	馬達編號		步進角 Deg	電壓 V/Phase	電流 A/Phase	握持扭矩 gf-cm	阻抗 Ω/Phase	感抗 mH/Phase	轉子慣量 g-cm ²	重量 g
	單軸	雙軸								
42mm	MPK243-01A	MPK243-01B	1.8	4.0	0.95	1600	4.2	2.5	35	200
	MPK243-02A	MPK243-02B	1.8	9.6	0.4	1600	24	15	35	200
	MPK243-03A	MPK243-03B	1.8	12	0.31	1600	38.5	23	35	200
	MPK244-01A	MPK244-01B	1.8	4.0	1.2	2600	3.3	3.2	53	250
	MPK244-02A	MPK244-02B	1.8	6.0	0.8	2600	7.5	7.0	53	250
	MPK244-03A	MPK244-03B	1.8	12	0.4	2600	30	28	53	250
	MPK244-04A	MPK244-04B	1.8	24	0.2	2600	120	112	53	250
	MPK245-01A	MPK245-01B	1.8	4.0	1.2	3200	3.3	2.8	68	350
	MPK245-02A	MPK245-02B	1.8	6.0	0.8	3200	7.5	7.0	68	350
	MPK245-03A	MPK245-03B	1.8	12	0.4	3200	30	28	68	350

23

馬達編號	馬達編號		步進角 Deg	電壓 V/Phase	電流 A/Phase	握持扭矩 gf-cm	阻抗 Ω/Phase	感抗 mH/Phase	轉子慣量 g-cm ²	重量 g
	單軸	雙軸								
56mm	MPK264-01A	MPK264-01B	1.8	5.7	1.0	4300	5.7	5.6	120	470
	MPK264-02A	MPK264-02B	1.8	2.8	2.0	4300	1.4	1.5	120	470
	MPK264-03A	MPK264-03B	1.8	1.9	3.0	4100	0.63	0.6	120	470
	MPK266-01A	MPK266-01B	1.8	7.4	1.0	8500	7.4	15	280	700
	MPK266-02A	MPK266-02B	1.8	3.6	2.0	8500	1.8	2.9	300	700
	MPK266-03A	MPK266-03B	1.8	2.3	3.0	9000	0.75	1.6	300	700
	MPK268-01A	MPK268-01B	1.8	8.6	1.0	13500	8.6	16.2	480	1000
	MPK268-02A	MPK268-02B	1.8	4.5	2.0	13500	2.25	3.8	480	1000
	MPK268-03A	MPK268-03B	1.8	3.0	3.0	13500	1.0	1.7	480	1000
	60mm	MPK2564-A	MPK2564-B	1.8	2.0	4.0	4000	0.5	3.3	450
MPK2566-A		MPK2566-B	1.8	2.0	4.0	8500	0.5	3.8	570	1000
MPK2569-A		MPK2569-B	1.8	2.0	4.0	13500	0.5	4.3	900	1400

34

馬達編號	馬達編號		步進角 Deg	電壓 V/Phase	電流 A/Phase	握持扭矩 gf-cm	阻抗 Ω/Phase	感抗 mH/Phase	轉子慣量 g-cm ²	重量 g
	單軸	雙軸								
86mm	MPK296-01A	MPK296-01B	1.8	4.4	2.0	20000	2.2	8.0	1400	1750
	MPK296-02A	MPK296-02B	1.8	3.0	3.0	22000	1.0	4.0	1400	1750
	MPK296-03A	MPK296-03B	1.8	2.0	4.5	22000	0.45	1.9	1400	1750
	MPK299-01A	MPK299-01B	1.8	6.4	2.0	44000	3.2	20	2700	2800
	MPK299-02A	MPK299-02B	1.8	4.2	3.0	44000	1.4	6.6	2700	2800
	MPK299-03A	MPK299-03B	1.8	2.8	4.5	42000	0.66	3.0	2700	2800
	MPK2913-01A	MPK2913-01B	1.8	7.6	2.0	66000	3.8	25	4000	3930
	MPK2913-02A	MPK2913-02B	1.8	3.8	4.0	66000	0.97	5.5	4000	3930